

Part of Absolent Air Care Group



- Oct effective and simple to maintain
- Manufactured in the UK









Why use Filtermist units?

- Oil mist is hazardous to health
- Oil mist causes slippery floors and can cause damage to sensitive electrical switchgear and circuitry
- Oil mist can lead to coating of ventilation pipes a potential fire risk
- Official regulations are becoming increasingly strict around the world
- AX units help to reduce energy and heating costs by recycling clean air back into the factory
- No expensive media filters to replace meaning low maintenance costs

How AX units work

1 Oil mist is removed at source

Oil mist is removed from the air by centrifugal impaction

3 Clean oil is returned to the machine

4 Clean air is returned to the workplace

A perforated drum containing four specially designed vanes rotates at high speed.

Oil mist is drawn into the drum where it impacts on the vanes at high velocity, causing the mist to coalesce. Special drum pads assist the coalescing process, filter out stray solid particles and reduce noise.

Centrifugal force pushes oil to the unit's outer case where it drains back to the machine for re-use or collection. Clean air is returned to the workshop through the top of the unit.



Proven Experience

UK manufacturer, Filtermist Limited, has been providing effective oil mist filters since 1969. Its products are trusted by world leading manufacturers to protect people from harmful airborne oil mist particles.

Filtermist has worked alongside government research institutes and global machine manufacturers to develop the most well-known and well-used oil mist extraction system in the world.

Filtermist oil mist collectors are an industry standard in many sectors including aerospace and automotive, medical device manufacture and general precision engineering.

Local support in more than 60 countries worldwide



Applications






AX oil mist collectors can be used on Machining centres, Lathes, Industrial Saws and other machining operations that generate airborne oil mist particles.

They are designed to be direct mounted – freeing up valuable floor-space.

	D	eclara	tic	on of Co	onformity						
EC DECI	ARATION	OF CONFO	TY	FILTERMIST							
Manufacturer's name:	Filtermist Limited			Machineryo	overed by this declaration:						
	Filtermist Limited, Telford 54 Business Park, Nadge Hill, Telford, TF3 5&L, England			Description:	Oil Mist Filter						
Full address:				Function:	To be fitted to machinery to extract oil fumes						
				Type:	AX Series						
Authorised Representative:	Absolent AB	Absolent AB			AX10, AX20, AX30						
Full address:	Staplaregatan 1 SE-531 40 Lidkö Sweden	SE-531 40 Lidköping			See unit						
The machinery conforms to all the requirements of the Machinery Directive 2006/42/EC.											
The machinery also conforms to the following Directive: BMC Directive 2014/36/EC RoHS Directive: ROHS Directive 2011/65/EU											
The following stand been used:	ards have	EN12100:2010, EN 60204-1:2018, EN ISO 14120:2015, EN ISO 13857:2019									
The technic	al file is compiled in	accordance with p	art A o	Annex VII of the Ma	achinery Directive 2006/42/EC.						
Person authorised to compile the technical file (based in the European Community):		Name:									
		Address:	Saparegaan 1 SE-531 40 Lidköping Sweden								
The relevant aut	horised person und vant information or	lertakes to transmit, in the machinery. Thi	in resp is infor	oonse to a reasoned mation will be transn	request by the national authorities, nitted by: (email, post)						
Person authorised t	o make this Name		: James Starsfield								
ORCHESSOR:		Position in company:	CEO	Œ							
		Signature:	J	Il Starofeld							
	Place of Declaration:	Filtermist Limited, Telford 54 Business Park, Nedge Hill, Telford, TF3 3AL, England									
		Date of Declaration:	January 1st 2023								
			1!	5	AX SERIES						

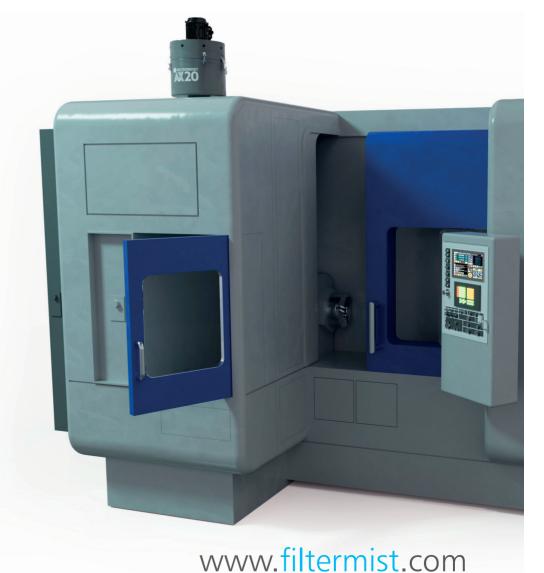



SERIES

Range & Specification



Model	Airflow m³/min	Motor ¹		А	В	С	D	Weight kg	Noise ² dBA
AX5	7 @ 50Hz 8 @ 60HZ	0.55kW 50Hz 200v, 220v, 380v, 400v	0.55kW 60Hz 200v, 220v, 230v, 440v, 460v, 480v	325	374	35	148	14	65
AX10	13 @ 50Hz 16 @ 60HZ	0.55kW 50Hz 200v, 220v, 380v, 400v	0.55kW 60Hz 200v, 220v, 230v, 440v, 460v, 480v	325	427	35	148	15	67
AX20	21 @ 50Hz 25 @ 60Hz	1.1kW 50Hz 200v, 220v, 380v, 400v	1.1kW 60Hz 200v, 220v, 230v, 440v, 460v, 480v	357	532	35	148	23	70
AX30	33 @ 50Hz 40 @ 60Hz	2.2kW 50Hz 200v, 220v, 380v, 400v	2.2kW 60Hz 220v, 230v, 440v, 460v, 480v	438	642	35	198	37	73



www.filtermist.com



Part of Absolent Air Care Group

¹ Motors to be used on specified voltages only.

² Results are in test conditions ± 3% tolerance. Local variations and in use conditions may affect readings.

^{*}Testing carried out in house under lab conditions