


Mobile Stand

The mobile stand is engineered to make it easy to move a Filtermist unit wherever it's needed. Optimised for use on grinding applications — especially when paired with a cyclone pre-filter — the stand offers superior flexibility on the shop floor. Its elevated height allows for straightforward servicing and maintenance of the Filtermist unit, helping to minimise downtime.

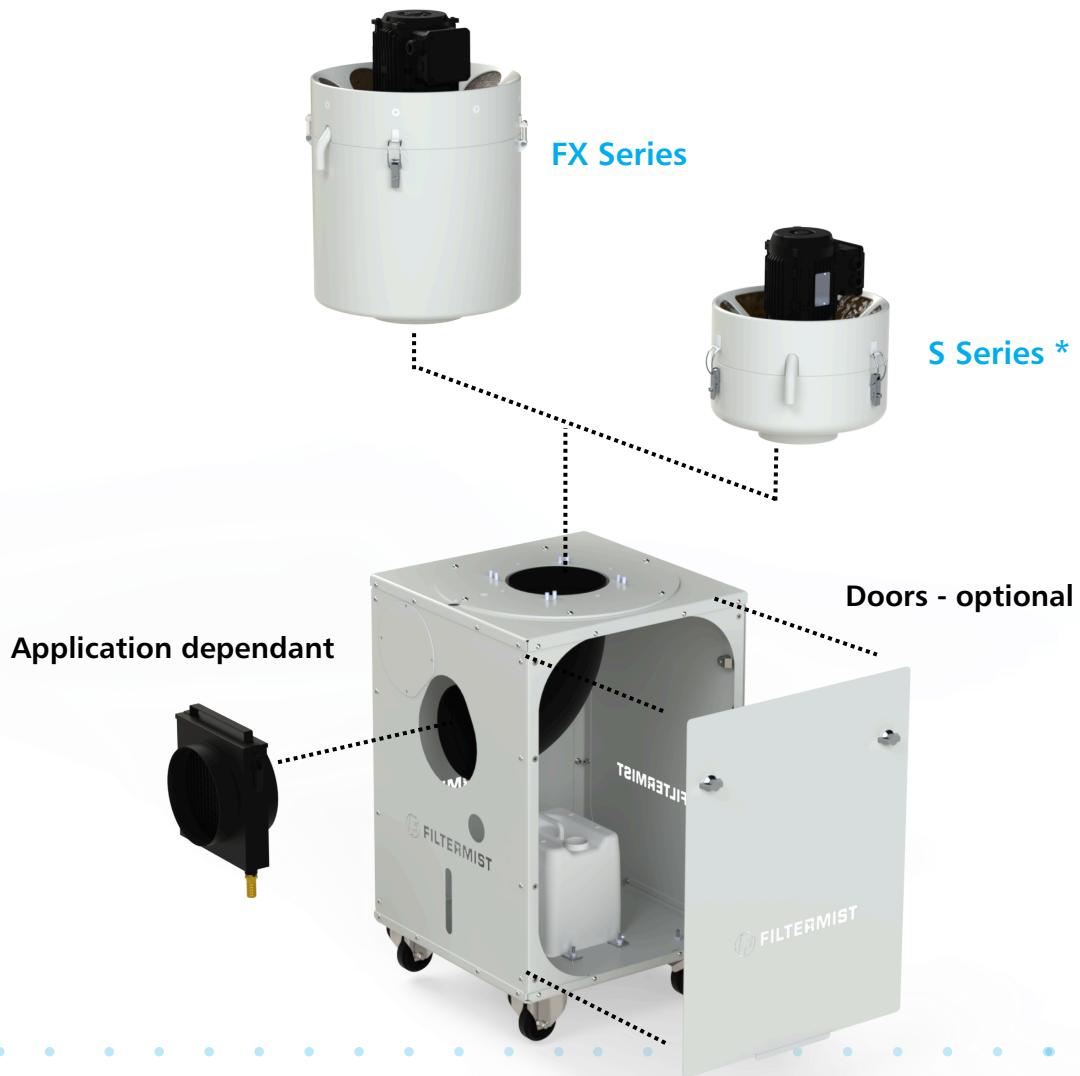

Filtermist Setup Options


Setup Type	Filtermist Units	Cyclone or Prefilter	Bends Required
Standard Setup - Large Units	FX7002, FX6002, FX5002	20-211-30-011 Prefilter (200mm), c/w collar, Black, RAL9005	20-211-20-017 200mm 90° Bend, c/w collar Black, RAL9005
Standard Setup - Small Units	FX4002, S800, S400	20-211-30-010 Prefilter (150mm), c/w collar Black, RAL9005	20-211-20-016 150mm 90° Bend, c/w collar Black, RAL9005
Swarf Cyclone Setup	FX4002 & FX5002	20-205-30-007 Swarf Cyclone, RAL7035	Not Required



With Doors



Without Doors




Weights & Dimensions


	Fully Built Mobile Stand Without Doors	Fully Built Mobile Stand With Doors
Part Number	20-205-30-010	20-205-30-009
Standard RAL Reference	7035	
Dimensions (HxWxD)	885cm x 599cm x 599cm	
Weight	38kg	52kg



Application Options



Mobile Stand with Cyclone



Mobile Stand with Pre-Filter

• excludes S200

