

AD051, AD101, AD151

Modular Industrial Dust and Fume Filters



- Optimized design for performance, energy consumption and filter lifespan
- Modular construction enables short lead times
- Unique innovations including clean side, tool free, filter change clamping mechanism* ensure ease of use
- Low running costs thanks to True Downflow technology and inverter driven fan options
- Galfan pre-coated steel as standard for extended service life

Flexible filter unit for dust and fume applications

Modular dust filter that can be configured to meet specific performance requirements and customer needs.

Absolent's unique 'True Downflow' technology enables 'High Filtration Power Density' – optimum performance in a small footprint.

The innovative CleanChange™ filter change mechanism is located in the clean air section, making filter change cleaner, easier and safer. The filter retention system is positioned away from the contaminated air and the filter elements are securely linked together. This design provides easy access to the filters, eliminates the need for special tools, and removes the need for operators to enter the unit for maintenance.

Function

Modular dust filter that can be configured to meet specific performance requirements and customer needs.

True Downflow technology, which combines a downflow air pattern with vertical filter elements, forces the separated dust down into the dust disposal solution and ensures that following pulse jet cleaning, the dust is directed downwards. The incoming air stream 'washes' dust from the vertical filter elements enabling a two-stage cleaning system for optimized efficiency. Vertical filter elements allow this washing due to their orientation - traditional horizontal filter elements can compact dust on the top. Using vertical filter elements also means that the dust that is cleaned from each element is directed straight into the dust disposal solution, not onto filters below as with a horizontal arrangement.

The cartridges can be monitored by a differential pressure sensor that measures the cleanliness of the filter elements and only cleans on demand to ensure optimal filtration efficiency and reduced energy consumption.


Applications



Welding



Laser cutting / Plasma cutting



Dry machining




Grinding




And more

Dimensions


AD051

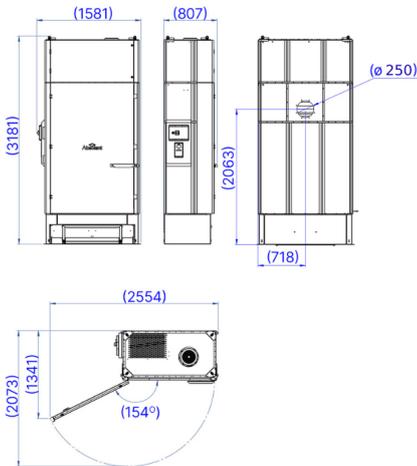

AD101

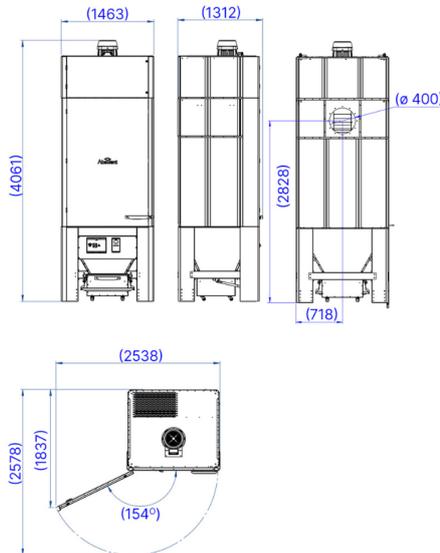

AD151

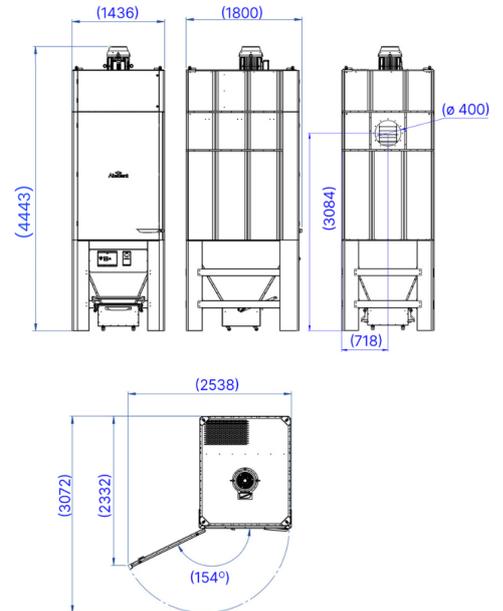

Technical specifications

Technical specifications AD051, AD101, AD151


	AD051	AD101	AD151
General			
Application	Hot & Abrasive Metal Fumes & Dust	Hot & Abrasive Metal Fumes & Dust	Hot & Abrasive Metal Fumes & Dust
Airflow range	1 200-3 600 m ³ /h	2 400-7 200 m ³ /h	3 600-10 800 m ³ /h
Maximum external pressure	3 000 Pa	3 000 Pa	3 000 Pa
Pressure drop of the unit	2 000 Pa	2 000 Pa	2 000 Pa
Fan motor power			
Inverter Driven	4,0 kW, 5,5 kW, 7,5 kW (integral)	7,5 kW, 11,0 kW, 15,0 kW (integral)	11,0 kW, 15,0 kW, 18,5 kW (integral)
Energy class	IE3	IE3	IE3
External Finish	Galfan pre-coated steel, high corrosion resistance	Galfan pre-coated steel, high corrosion resistance	Galfan pre-coated steel, high corrosion resistance
Material Thickness	2,5-3,0 mm	2,5-3,0 mm	2,5-3,0 mm
Location	Indoor use only.	Indoor use only.	Indoor use only.
Connections			
Inlet type	DIN 24154/T2	DIN 24154/T2	DIN 24154/T2
Inlet diameter	250 mm	400 mm	400 mm
Inlet placement	Rear	Rear	Rear
Outlet type	Via integral fan or open DIN 24154/T2 connection	Via integral fan or open DIN 24154/T2 connection	Via integral fan or open DIN 24154/T2 connection
Outlet diameter	250 mm	450 mm	450 mm
Outlet placement	Top	Top	Top
Compressed air supply	12 mm connection - 6 Bar Clean & Dry Supply	12 mm connection - 6 Bar Clean & Dry Supply	12 mm connection - 6 Bar Clean & Dry Supply
Electrical information	400V, 3 phase, 50 Hz	400V, 3 phase, 50 Hz	400V, 3 phase, 50 Hz
Dust collection			
Drawer	140l (37.0 gal (US))	280l (74.0 gal (US))	N/A
Bin	N/A	115l (30.4 gal (US))	115l (30.4 gal (US))
Filter			
Diameter Primary filter elements	324 mm	324 mm	324 mm
Number of Primary filter elements	2 pcs	4 pcs	6 pcs
Filter efficiency	All filter elements are in accordance with EN 60335-2-69:AA Dust Class M Rating. Dust Class M relates to an efficiency of > 99.9% under conditions given in EN 60335-2-69:AA.		
Filter media	Polyester & Polyester Nano Fibre	Polyester & Polyester Nano Fibre	Polyester & Polyester Nano Fibre
Total Filter area	40 m ²	80 m ²	120 m ²
Filter cartridge length	1 200 mm	1 200 mm	1 200 mm
Secondary filter	Separate	Separate	Separate
Pre-treatment (Pre-coating Powder)	Yes, as option	Yes, as option	Yes, as option
Physical properties			
Width	1 581 mm (62.24 in)	1 436 mm (56.54 in)	1 436 mm (56.54 in)
Height	3 181 mm (125.24 in)	4 061 mm (159.88 in)	4 443 mm (174.92 in)
Depth	807 mm (31.77 in)	1 312 mm (51.65 in)	1 800 mm (70.87 in)
Weight with fan	802 kg (1769 lb)	1 188 kg (2619 lb)	1 800 kg (3968 lb)
Sound level			
Sound level Continuous (fan) ¹	75 db(A)	75 db(A)	75 db(A)

¹The sound level is measured 1 m from the filter unit under free field conditions. Contact Absolent or dealer/distributor for sound calculation on specific location.


Description of the concept

AD filters are designed with a modular architecture and state-of-the-art technology to provide the most advanced industrial filter on the market today. Our 'True Downflow' technology enables us to provide the highest performance in all aspects, and full flexibility to ensure our customers' unique requirements are met.

Dust Disposal Options

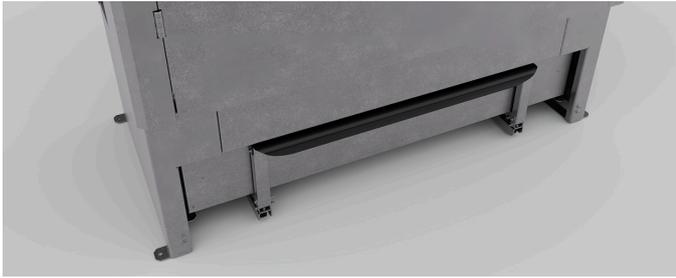

Drawer - AD051, AD101

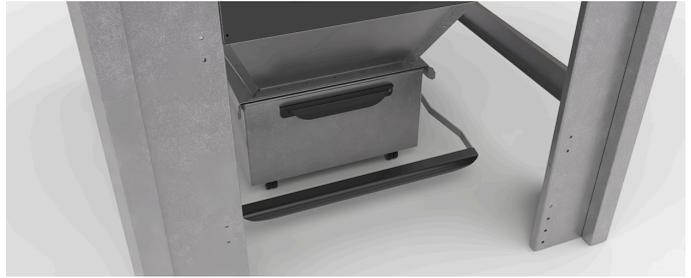

Bin - AD101, AD151

Filter Elements

Industrial processes generate particles of various sizes and concentrations. Absolent's filter cartridges are available in several different materials and finishes, specially developed to cope with the variation in particulate characteristics.

AD Filter Elements

Technical information AD Filter Elements	
Filter cartridge length	1200 mm
Diameter	324 mm
Filter media	Polyester / Polyester Nano Fibre
Removal	Outside of unit, no confined space working
Mechanism	In clean section, no exposure to contaminant
Total Filter area	20 m ²